




1. SQUARE UP THE CORNERS OF THE BACKING
2. MAKE SURE YOU HAVE AT LEAST THE SAME WIDTH OF BACKING SHOWING AROUND ALL FOUR SIDES OF THE FRONT. IF YOUR FRONT IS "OUT OF WHACK", DRAW LINES ON THE BACKING USING A T-SQUARE OR SIMILAR MEASURING TOOL.

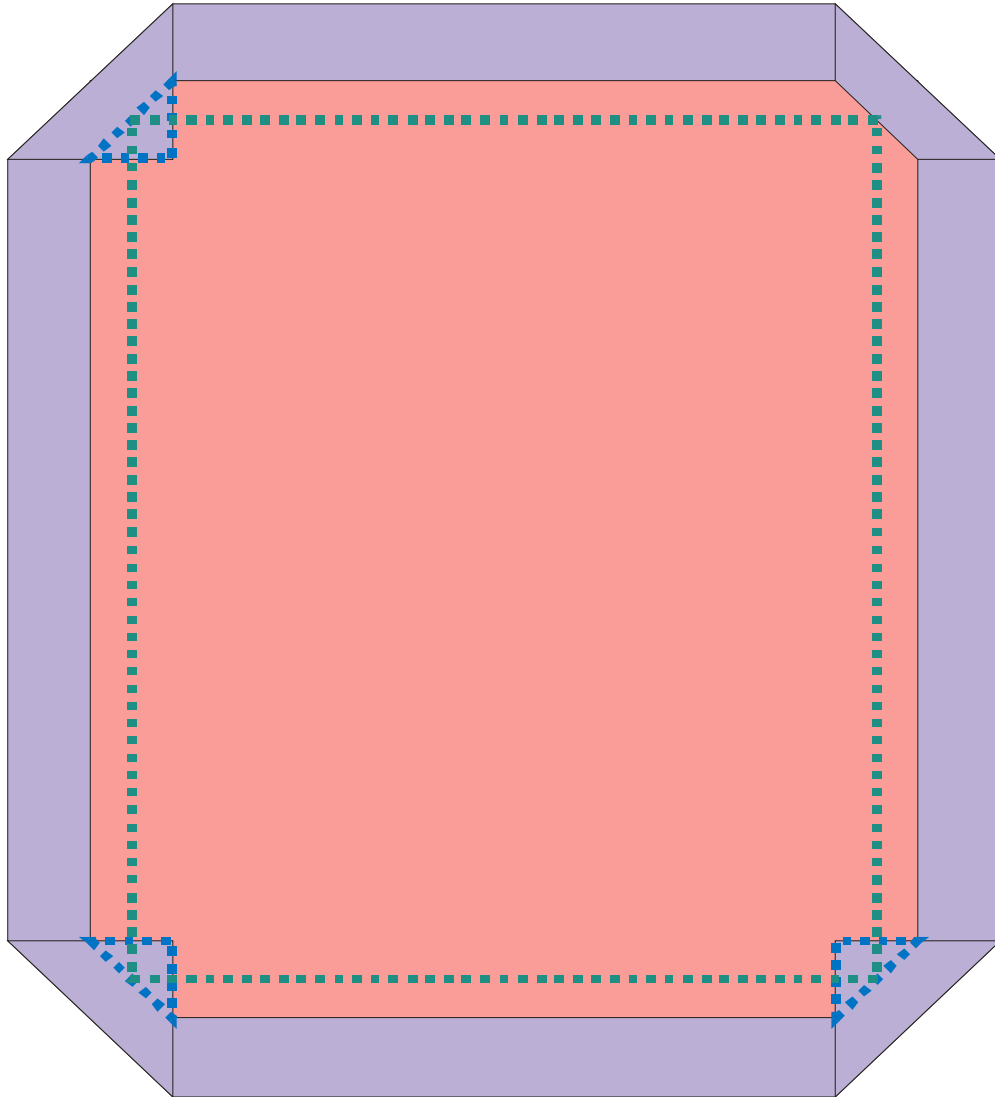

1. FOLD IN EACH OF THE FOUR CORNERS. USE A MEASURING TOOL TO MAKE SURE YOU HAVE 45 DEGREE ANGLES AT ALL FOUR CORNERS. PRESS FOLDS.
2. ONCE YOU'RE SURE EVERYTHING IS LINED UP PROPERLY, TRIM AS SHOWN BY THE BLUE DOTTED LINES.
3. USE A RULER TO DRAW LINES ON THE TOP WHERE YOU WANT THE BINDING TO LINE UP FOR FINAL FOLDING AND STITCHING INTO PLACE.

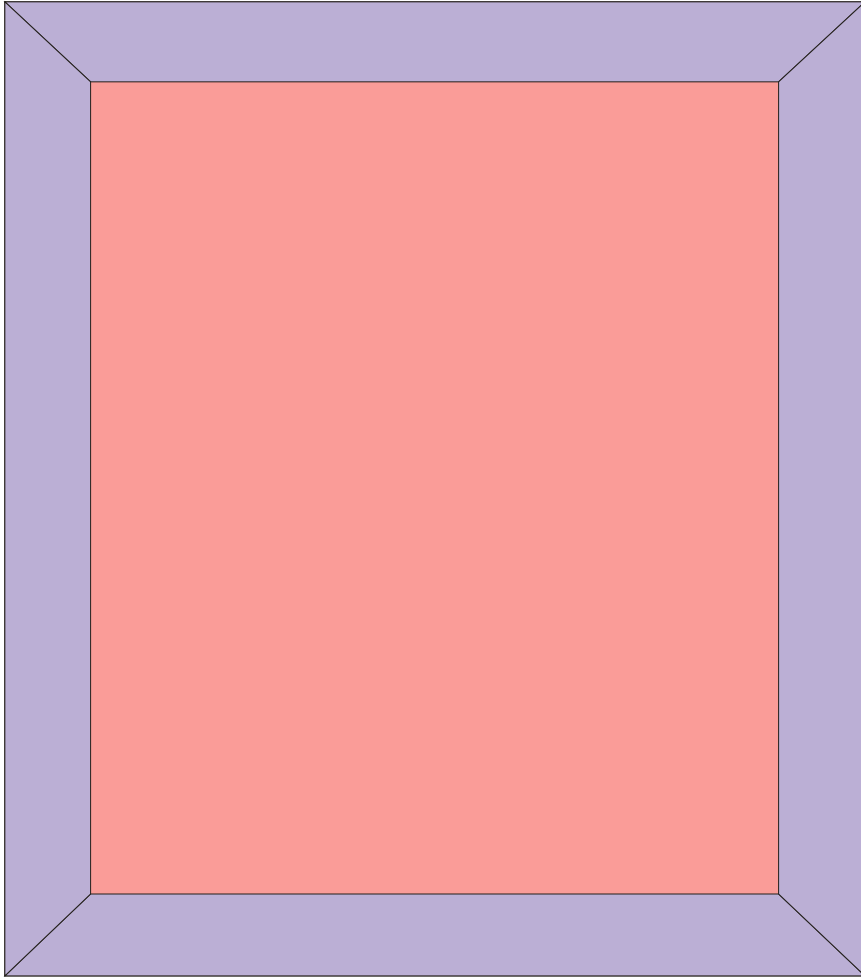

1. FOLD THE BACK IN OVER THE TOP MATCHING UP AND PRESSING THE CORNER ANGLES INTO PLACE

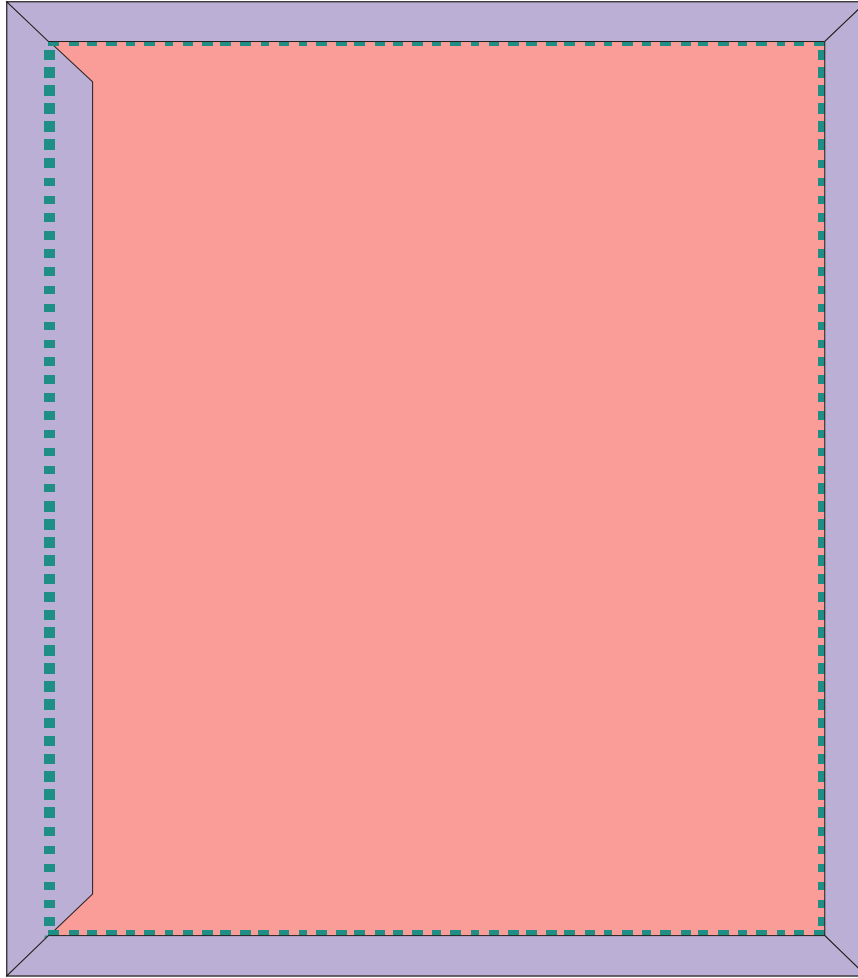

1. FOLD THE BINDING IN TO MATCH THE GUIDELINES YOU DREW ON THE TOP. MATCH THE CORNERS, PRESSING INTO PLACE AS YOU GO.
2. WHIP STITCH THE FOUR DIAGONAL CORNERS
3. PIN THE BINDING INTO PLACE OR USE A LIGHT-WEIGHT DOUBLE-SIDED FUSIBLE WEBBING TO KEEP IT IN PLACE.
4. HAND OR MACHINE STITCH THE FOUR EDGE. DO THIS EVEN IF YOU USED A FUSIBLE WEBBING TO ENSURE THE BINDING SURVIVES MACHINE WASHING.